

superLinear power amplifier



DC–24kHz Intermodulation Distortion Spectrum (Audio Precision System Two - Cascade Plus)

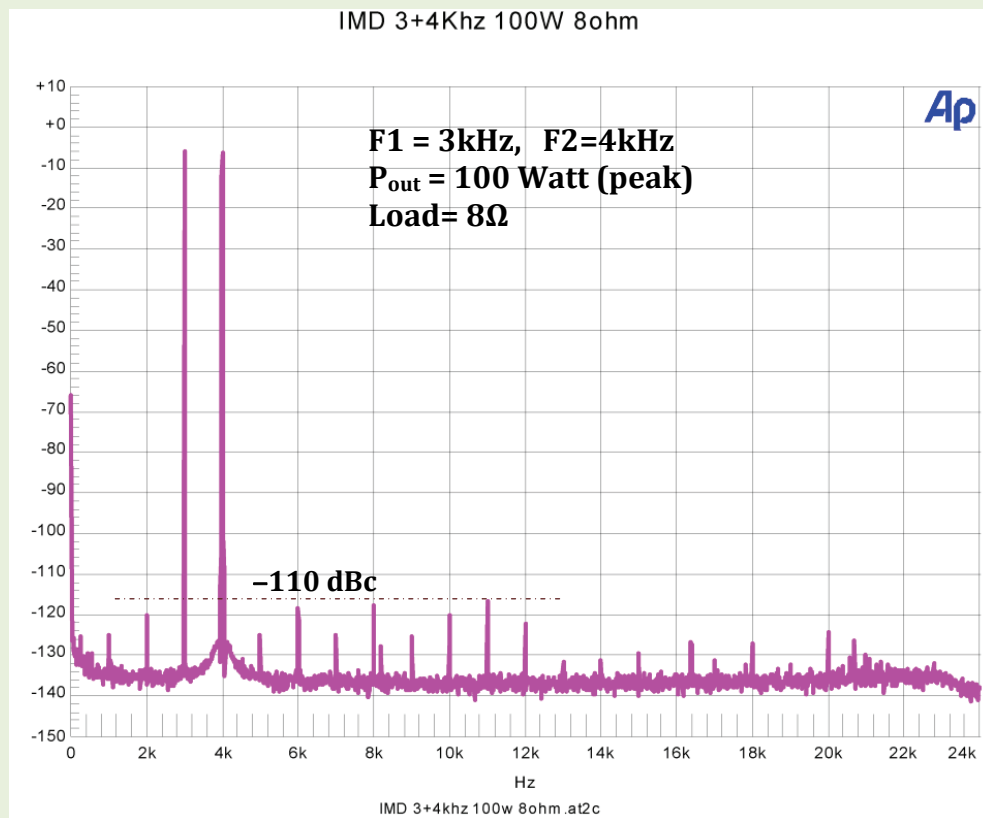


Fig. 5a: DC-24 kHz Intermodulation Distortion spectrum.
Freq=3kHz+4kHz. Load=8Ω. Output power=100W peak.

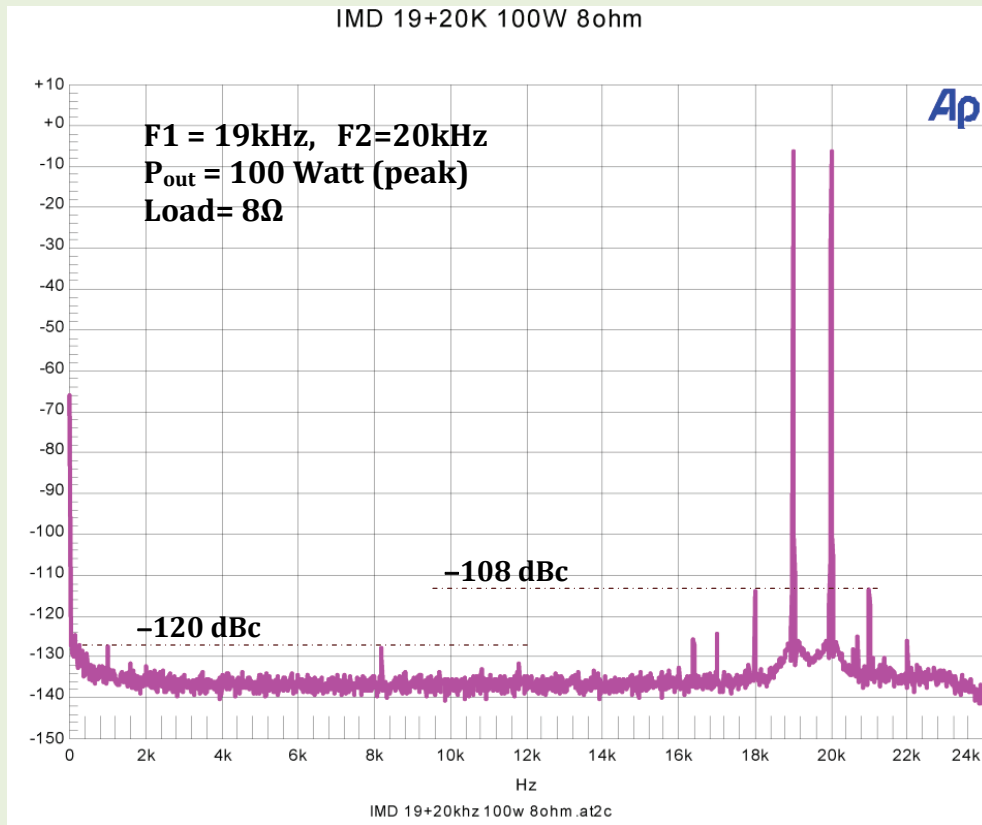


Fig. 5b DC-24 kHz Intermodulation Distortion spectrum. Freq=19kHz+20kHz. Load=8Ω. Output power=100W peak.

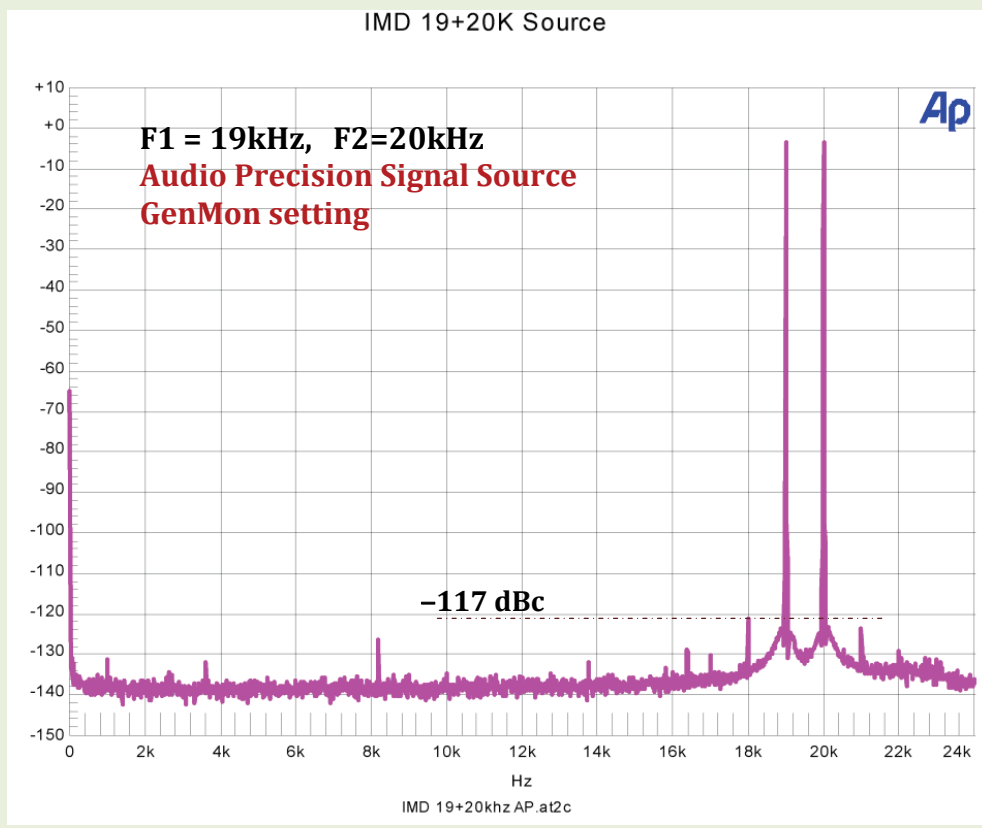


Fig. 5c: DC-24 kHz IMD Distortion spectrum. Freq=19kHz+20kHz. Signal Source with AP test equipment in GenMon setting.